Roll-Off Container's Standard Duty

	Specifications				
N	Manufacture's Rated Size	Shipping Weight			
	10 Cubic Yards	3, 320 Lbs (approx)			
	15 Cubic Yards	4, 480 Lbs (approx)			
	20 Cubic Yards	5, 640 Lbs (approx)			
	25 Cubic Yards	6, 100 Lbs (approx)			
	30 Cubic Yards	6, 560 Lbs (approx)			
	40 Cubic Yards	7, 810 Lbs (approx)			
	Construction	Standard			
Sides	Side Walls	10 Ga.			
	Top Rails	4" x 4" x 3/16" Tube			
	Side Supports	10 Ga. Formed Channel			
		24" Centers			
	Rear Corner Posts	1/4" Formed Channel			
Floor	Long Rails	6" x 2" x 1/4" Tube			
	Rail End Inserts	1 1/2" Plate			
	Floor Plate	3/16" Plate			
	Floor Reinforcement	3"- 4.1 # Structural Channel			
	1 loor Remioreement	16" Centers			
	Hook Plate	3/4" Plate			
	Hook	1 1/2" Plate			
	Rollers	3 1/2" O.D. x 6" Wide			
	Roller Arms	1" Plate			
	Wheels	10 3/4" O.D. x 8" Wide			
	Axles	1 7/8" O.D. with Grease Fittin			
	Wheel Brackets	3/8" Plate			
Front	Wall	10 Ga.			
	Reinforcement	3/16" Formed Channel			
	Bumper Pad	3/8" x 12" x 36" Formed			
Door	Wall	10 Ga.			
	Frame	4" x 4" x 3/16" Tube			
	Supports	2 - 3/16" Formed Channel			
All	Specifications are subject to	change without notice.			

10 to 40 - Yard Capacity


Standard Features

- ➤ Grease Fittings on All Hinges & **Both** Sides of All Axles
- Door Guides
- Single Handled Latch Lever Bar
- Tarp Hold Downs

Available Options

- Neoprene Door Seals
- Custom Latch Systems
- ➤ Top Hinged "Dump Style" Door
- Custom Top Covers
- > 1/2" x 2" Rail Wear Strips
- > 6" x 2" x 3/8" Rails
- Customization Available

Model	Α	В	С	D	E	F	Capacity
RO-10	12' 6 1/2"	11'	56"	44"	96"	85 1/2"	10 Yards
RO-15	17' 6 1/2"	16'	56"	44"	96"	85 1/2"	15 Yards
RO-20	23' 6 1/2"	22'	56"	44"	96"	85 1/2"	20 Yards
RO-25	23' 6 1/2"	22'	66"	54"	96"	85 1/2"	25 Yards
RO-30	23' 6 1/2"	22'	76"	64"	96"	85 1/2"	30 Yards
RO-40	23' 6 1/2"	22'	96"	84"	96"	85 1/2"	40 Yards

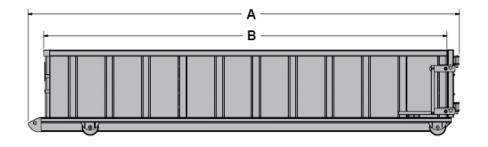




Illustration for reference only



Distributor