Roll-Off Containers Heavy Duty

	Specifications			
l	Manufacture's Rated Size	Shipping Weight (approx)		
	20 Cubic Yards	6, 174 Lbs		
25 Cubic Yards		6, 615 Lbs		
30 Cubic Yards		7, 056 Lbs		
40 Cubic Yards		9, 290 Lbs		
50 Cubic Yards		11, 270 Lbs		
60 Cubic Yards		13, 975 Lbs		
	70 Cubic Yards	16, 170 Lbs		
	80 Cubic Yards	18, 032 Lbs		
	90 Cubic Yards	19, 845 Lbs		
Construction		Heavy Duty		
Sides	Side Walls	3/16" Plate		
	*Side Stiffener	3/16" Formed Horizontal Dirt Shedding		
	Top Rails	4" x 4" x 1/4" Tube		
	Side Supports	3/16" Formed Channel		
	Rear Corner Posts	10' Centers (Over 22') 1/4" Formed Channel		
Floor	Long Rails	6" x 2" x 5/16" Tube		
	Rail End Inserts	1 1/2" Plate		
	Floor Plate	1/4" Plate		
	Floor Reinforcement	3"- 4.1 # Structural Channel 12" Centers		
	Hook Plate	1" Plate		
	Hook	2" Plate		
	Rollers	3 1/2" O.D. x 6" Wide		
	Roller Arms	1" Plate		
	Wheels	10 3/4" O.D. x 8" Wide		
	Axles	1 7/8" O.D. with Grease Fitting		
	Wheel Brackets	3/8" Plate		
Front	Wall	3/16" Plate		
	Reinforcement	3/16" Formed Channel		
	Bumper Pad	3/8" x 12" x 36" Formed		
Door	Wall	3/16" Plate		
	Frame	4" x 4" x 1/4" Tube		
	Supports	2 - 3/16" Formed Channel		

Tub Style 20 to 80-Yard Capacity

Standard Features

- > Grease Fittings on All Hinges & **Both** Sides of All Axles
- Door Guides
- ➤ Single Handled Latch Lever Bar
- > Tarp Hold Downs

Available Options


- Neoprene Door Seals
- Custom Latch Systems
- > Top Hinged "Dump Style" Door
- Custom Top Covers
- Customization Available


Model	Α	В	С	D	E	F	Capacity
RO-20	23' 6 1/2"	22'	56"	44"	96"	85 1/2"	20 Yards
RO-25	23' 6 1/2"	22'	66"	54"	96"	85 1/2"	25 Yards
RO-30	23' 6 1/2"	22'	76"	64"	96"	85 1/2"	30 Yards
RO-40	23' 6 1/2"	22'	96"	84"	96"	85 1/2"	40 Yards
RO-50	29' 6"	28'	96"	84"	96"	85 1/2"	50 Yards
RO-60	35' 6"	34'	96"	84"	96"	85 1/2"	60 Yards
RO-70	39' 6"	38'	96"	84"	96"	85 1/2"	70 Yards
RO-80	39' 6"	38'	102"	90"	102"	91"	80 Yards
RO-90	44' 6"	43'	102"	90"	102"	91"	90 Yards

* Roll-Off Containers over 22' in length have two Side Stiffeners

All Specifications are subject to change without notice.

CONTRACT WELDING

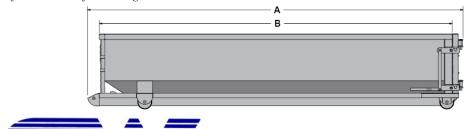



Distributor