Roll-Off Containers Heavy Duty

	Specifications				
	Manufacture's Rated Size	Shipping Weight			
Г	20 Cubic Yards	6, 300 Lbs (approx)			
	25 Cubic Yards	6, 750 Lbs (approx)			
	30 Cubic Yards	7, 200 Lbs (approx)			
	40 Cubic Yards	9, 480 Lbs (approx)			
	50 Cubic Yards	11, 500 Lbs (approx)			
	60 Cubic Yards	14, 260 Lbs (approx)			
	70 Cubic Yards	16, 500 Lbs (approx)			
	80 Cubic Yards				
	90 Cubic Yards	18, 400 Lbs (approx)			
	Construction	20, 250 Lbs (approx)			
les	Side Walls	Heavy Duty 3/16" Plate			
	Top Rails	4" x 4" x 1/4" Tube			
	1 op Kans	3/16" Formed Channel			
Sic	Side Supports	24" Centers			
	Rear Corner Posts	1/4" Formed Channel			
	Long Rails	6" x 2" x 5/16" Tube			
	Rail End Inserts	1 1/2" Plate			
	Floor Plate	1/4" Plate			
	Floor Reinforcement	3"- 4.1 # Structural Channel			
1	Floor Reinforcement	12" Centers			
OI	Hook Plate	1" Plate			
Flo	Hook	2" Plate			
	Rollers	3 1/2" O.D. x 6" Wide			
	Roller Arms	1" Plate			
	Wheels	10 3/4" O.D. x 8" Wide			
	Axles	1 7/8" O.D. with Grease Fitting			
	Wheel Brackets	3/8" Plate			
4	Wall	3/16" Plate			
Fron	Reinforcement	3/16" Formed Channel			
	Bumper Pad	3/8" x 12" x 36" Formed			
_	Wall	3/16" Plate			
Door	Frame	4" x 4" x 1/4" Tube			
	Supports	2 - 3/16" Formed Channel			

20 to 90 - Yard Capacity

Standard Features


- Grease Fittings on All Hinges & **Both** Sides of All Axles
- Door Guides
- Single Handled Latch Lever Bar
- > Tarp Hold Downs

Available Options

- Neoprene Door Seals
- Custom Latch Systems
- ➤ Top Hinged "Dump Style" Door
- Custom Top Covers
- Customization Available

Model	Α	В	С	D	E	F	Capacity
RO-20	23' 6 1/2"	22'	56"	44"	96"	85 1/2"	20 Yards
RO-25	23' 6 1/2"	22'	66"	54"	96"	85 1/2"	25 Yards
RO-30	23' 6 1/2"	22'	76"	64"	96"	85 1/2"	30 Yards
RO-40	23' 6 1/2"	22'	96"	84"	96"	85 1/2"	40 Yards
RO-50	29' 6"	28'	96"	84"	96"	85 1/2"	50 Yards
RO-60	35' 6"	34'	96"	84"	96"	85 1/2"	60 Yards
RO-70	39' 6"	38'	96"	84"	96"	85 1/2"	70 Yards
RO-80	39' 6"	38'	102"	90"	102"	91"	80 Yards
RO-90	44' 6"	43'	102"	90"	102"	91"	90 Yards

All Specifications are subject to change without notice.

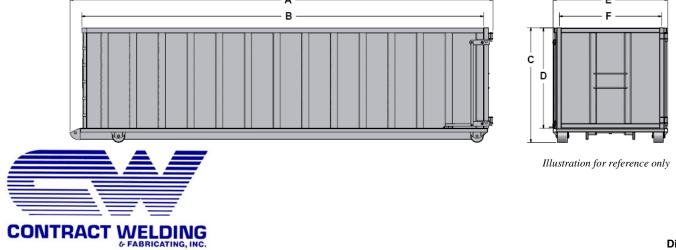

Distributor